

TRACTION BLOCK DEEP CYCLE

FLOODED LEAD-ACID TUBULAR PLATE

Advantages:

- Very long cycle life
- Excellent cycling properties
- High capacity performance
- Perfect for applications in difficult working conditions
- Increased endurance even in cases of poor charging conditions
- Excellent tubular plate construction with free electrolyte ensures long operating life





Model ID	Nominal Voltage	Capacity (Ah)			Dimensions			Weight /kg/	Layout	Terminal Type	PCS per Pallet
	V	C ₁₀₀	C ₂₀	C ₅	L /mm/	W /mm/	H /mm/				
TRC-TP6-195	6	260	245	195	243	189	277	31.50	0	A	36
TRC-TP6-185	6	255	235	185	260	180	280	31.10	0	DUAL; A	36
TRC-TP6-280	6	380	350	270	310	180	360	48.00	0	DUAL; A	24
TRC-TP6-310	6	425	390	310	310	180	410	56.00	0	DUAL; A	24
TRC-TP8-140	8	200	180	140	260	180	280	32.00	0	DUAL; A	36
TRC-TP12-90	12	130	115	90	343	172	235	34.00	0;1	A	28
TRC-TP12-120	12	155	140	120	343	172	295	41.00	0;1	A	28

*Cycle life – 1200 cycles in accordance with IEC 60254-1/DIN 40767
According to EN 61427 for solar application*

Applications:

- wheelchairs
- scissor lifts
- aerial devices
- golf carts
- caravans and motorhomes
- boats
- cleaning machines
- solar systems
- signaling and lighting
- remote monitoring and controlling

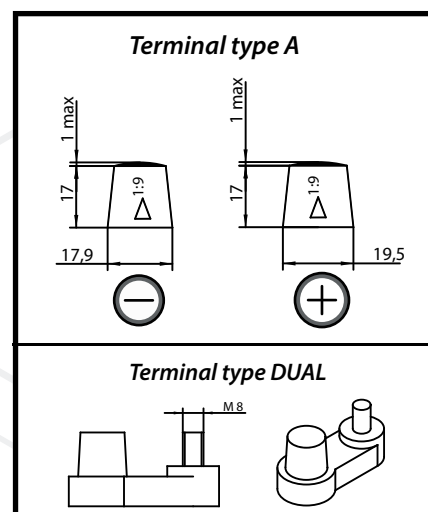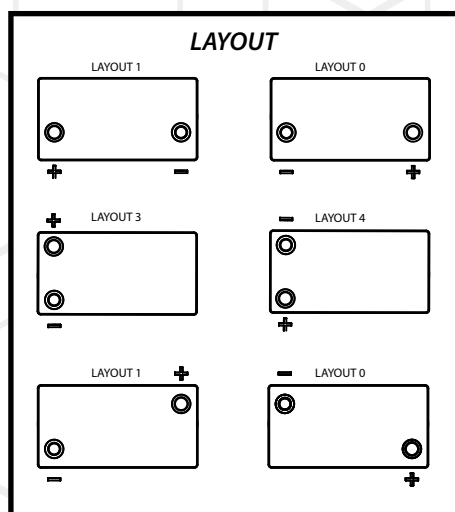

Charging profiles is Wa; WoWa, IUla; WUla